


Forklift Series

- Curtis Control
- Small AST
- Ergonomic Design
- Easy, Convenient Operation

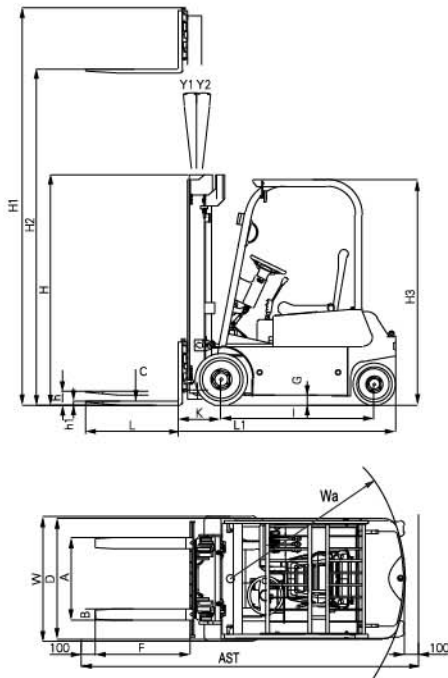

STANDARD SPECIFICATIONS

i-Lift No.		3010501	3010502	3010503
Model		CPD05S	CPD08S	CPD10S
Rated Capacity	kg (lbs)	500 (1100)	750 (1650)	1000 (2200)
Load Center	C mm (inch)	400 (16)	400 (16)	400 (16)
Max. Lifting Height	H2 mm (inch)	3200 (126)	3200 (126)	3100 (122)
Free Lifting	h mm (inch)	1600 (63)	1600 (63)	1220 (48)
Fork Length	L mm (inch)	800 (31.5)	800 (31.5)	800 (31.5)
Fork Width	B mm (inch)	90 (3.5)	90 (3.5)	90 (3.5)
Overall Fork Width	A mm (inch)	220-680 (8.7-26.8)	220-680 (8.7-26.8)	220-680 (8.7-26.8)
Min. Radius	Wa mm (inch)	1100 (43.5)	1250 (49)	1350 (53)
Lifting Speed	m/min (inch/min)	84/127 (3300/5000)	84/127 (3300/5000)	84/127 (3300/5000)
Lowering Speed	m/min (inch/min)	Adjustable	Adjustable	Adjustable
Mast Lowered Height	H mm (inch)	1900 (75)	1900 (75)	1900 (75)
Mast Max. Height	H1 mm (inch)	3600 (142)	3600 (142)	3600 (142)
Over Head Guard Height	H3 mm (inch)	1900 (75)	1900 (75)	1900 (75)
Width	W mm (inch)	800 (31.5)	800 (31.5)	800 (31.5)
Min. Clearance	G mm (inch)	85 (3.3)	90 (3.5)	90 (3.5)
Speed	m/min (inch/min)	6.5/7.8 (256/307)	6.5/7.3 (256/287)	6.5/7.0 (256/276)
Battery	Ah/V	210/24	280/24	385/24
AST	mm (inch)	2365 (93)	2365 (93)	2365 (93)
Driving Motor	KW(hp)	2.0 (2.7)	2.0 (2.7)	2.0 (2.7)
Pump Motor	KW(hp)	2.8 (3.8)	2.8 (3.8)	2.8 (3.8)
Tires		Rubber	Rubber	Rubber
Front Wheel x2	mm (inch)	Φ267×127 (Φ10.5×5)	Φ267×127 (Φ10.5×5)	Φ267×127 (Φ10.5×5)
Driving Wheel x1	mm (inch)	Φ267×127 (Φ10.5×5)	Φ267×127 (Φ10.5×5)	Φ267×127 (Φ10.5×5)
Net Weight	kg (lbs)	1250 (2750)	1380 (3050)	1550 (3400)