


Electric Chain Hoist EW series

Single Phase 220~230V, 50Hz

- Standard overload device protects hoist and operator.
- Features a dual brake system with electro-mechanical motor brake and regenerative braking.
- Lifetime gear train lubrication means no oil changes, dripping, product contamination, or disposal concerns.
- Precision bearings provide longer gear-train life and smoother operation.
- Meets or exceeds ASME/ANSI B30.16 and EN norms.
- Hoist housing enclosed and protected IP55.
- Pushbutton imported from Europe and protected to IP65, with voltage: 48V, special voltage is available on request.



EW251

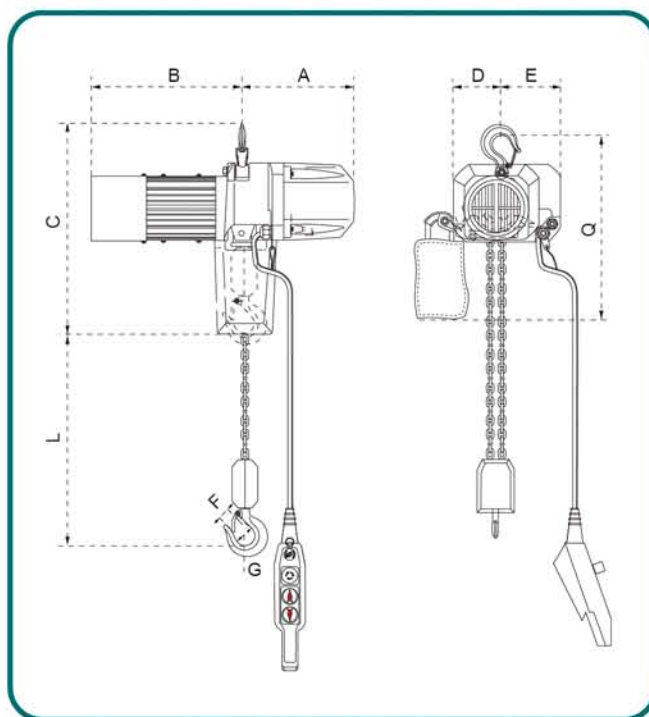

i-Lift No.		2211001	2211002	2211003	2211004	2211005	2211006
Model		EW121	EW252	EW161	EW322	EW251	EW502
Rated Capacity	(T)	0.125	0.25	0.16	0.32	0.25	0.5
Lifting Height	(m)	3	3	3	3	3	3
Lifting Speed	Fast (m/min)	8	4	12	6	8	4
	Slow (m/min)	2	1	3	1.5	2	1
Number of Falls		1	2	1	2	1	2
Load Chain	Dia.xP (mm)	Φ5x15	Φ5x15	Φ5x15	Φ5x15	Φ5x15	Φ5x15
Dimensions	A (mm)	236	236	236	236	236	236
	B (mm)	279	279	309	309	309	309
	C (mm)	400	400	400	400	400	400
	D (mm)	102.5	102.5	102.5	102.5	102.5	102.5
	E (mm)	122.5	122.5	122.5	122.5	122.5	122.5
	F (mm)	25	25	25	25	25	25
	G (mm)	36	36	36	36	36	36
	L (mm)	3000	3000	3000	3000	3000	3000
	Q (mm)	400	400	400	400	400	400
Net Weight	(kg)	28	28	28	28	28	28